



**Green Country
Lights LLC**

Streetlight Series

Specifications



Lifespan
50,000hrs



Operating Temperature
-40°C - +40°C



IP65 rating

FEATURES

- High pressure die cast aluminum gearbox, Antin-static powder coat finish.
- Beautiful appearance, Easy Installation, Maintenance Free.
- High efficient CREE LED Chip module ensures excellent performance.
- IP Rating: IP65




Application

- Roadways, Freeways, Highways, Parking lots, Off-street areas, etc



Sensor Option




CERTIFICATION



SPECIFICATIONS

Model	Power	ETL	DLC	Input Voltage	CCT	CRI	Delivered Lumens (5K)	Power Factor	THD	Installation
DG100SL	100W	YES	YES	100-277V 50/60HZ	5000K	>75	10,000 LM	>0.92	<15%	Φ1.97-2.36" (Φ50-60) Round pole
DG135SL	135W	YES	YES				13,500 LM			
DG165SL	165W	YES	YES				16,500 LM			
DG200SL	200W	YES	YES				20,000 LM			
DG230SL	230W	YES	YES				23,000 LM			

DIMENSION

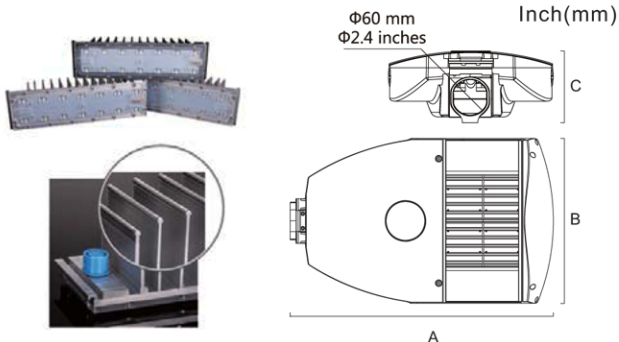

Model	A	B	C	Weight kg
DG100SL	30.71(780)	12.40(316)	5.40(136)	7.3
DG135SL	30.71(780)	12.40(316)	5.40(136)	8.2
DG165SL	30.71(780)	12.40(316)	5.40(136)	9.0
DG200SL	30.71(780)	12.40(316)	5.40(136)	9.9
DG230SL	30.71(780)	12.40(316)	5.40(136)	10.8

